


▶ Description

TamSil 290 is a low viscosity, silane-siloxane system which penetrates deeply into porous substrates to allow for a bonded hydrophobic lining to the pores. This treatment significantly reduces absorption of water and waterborne salts but still allows the passage of water vapour. The solution does not produce any discoloration of the substrate and has excellent resistance to weathering. TamSil 290 can be used as a chemical DPC.

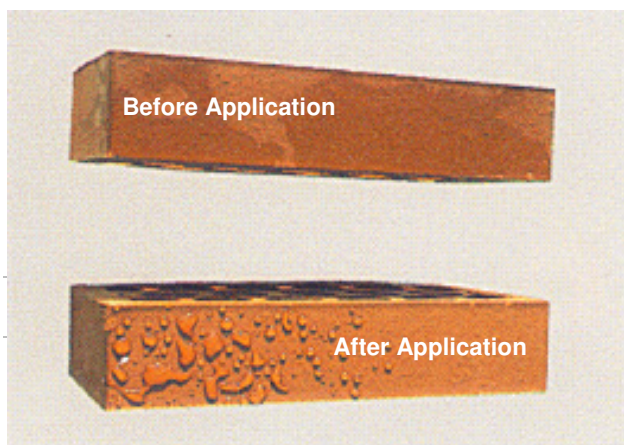

▶ Key Benefits

- Provides an invisible water repellent surface.
- Allows 100% transpiration of the surface.
- Maintains the texture and colour of the surface treated.
- Reduces efflorescence and surface salts.
- Reduces cleaning costs.
- Acts as a damp-proof course.

▶ Typical Applications

- External waterproofing of concrete, concrete blocks, brickwork and stone.
- Treatment of rising and salt damp.
- Reduction of sand stone decay due to attack by salts and low pH precipitation.
- Prevention of moss growth & dirt retention on pavers, walls and roofs.
- Elimination of white salt spotting on brickwork.

▶ Technical Data

TamSil 290	
Appearance	Clear Liquid
Coverage	0.5m ² – 3m ²
Viscosity	6 - 10cps
Solids	6% - 8% Active
Flash point	65°C
Shelf life	Up to 1 year if stored in unopened containers
Tack free	60 minutes
Hard dry	180 minutes
Application temperature	5°C - 40°C

All technical data stated herein is based on tests carried out under laboratory conditions.

▶ Application Guidelines

Surface Preparation

All surfaces must be free of all traces of dirt and organic matter. Gaps and cracks must be repaired. Salt encrustations must be cleaned using mild acid.

Application Method

For surface treatment use a low-pressure spray to achieve total saturation. Apply a minimum of 2 coats sequentially.

Note: Care should be taken not to spray on glass, painted surfaces and plant growth. TamSil 290 should never be applied to damp substrates.

▶ Coverage

This will vary depending on the substrate. It could be as low as 3m² per litre for dense concrete and as high as 0.5m² per litre for porous bricks. We recommend that a test area of 1 - 2m² be carried out on-site prior to application.

TamSil 290

Silane – Siloxane Water Repellent



▶ Storage

TamSil 290 should be stored at room temperature (min 10°C and max 38°C), kept dry and out of direct sunlight. If these conditions are maintained and the product packaging is unopened, then a shelf life of 1 year can be expected.

▶ Health & Safety

TamSil 290 should only be used as directed. We always recommend that the Health & Safety data sheet is carefully read prior to application of the material. Our recommendations for protective equipment should be strictly adhered to for your personal protection. The Health & Safety data sheet is available upon request from your local TAM International representative.

www.taminternational.com

TAM Australia

+61 8 8340 4166

TAM Hong Kong

+852 2690 3723

TAM India

+91 92 7222 5905

TAM Indonesia

+62 21 7801414

TAM Singapore

+65 6296 0364

TAM Taiwan

+886 49 2263 066

TAM UK

+44 2476 253098